


NORTH AMERICAN SEAL

& Packing Company

530 Van Ness Ave. Fresno, CA 93721
 (559) 264-7325 - Fax: (559) 268-5207

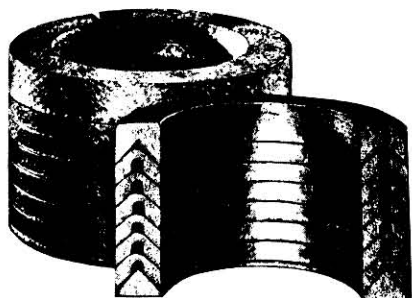

VEE PACKINGS

TYPE VP
 STYLE 75 (INCH SIZES)

CHARACTERISTICS

North American Seal's Vee Packings are multi-lip (chevron) type seals. Best suited for either piston or rod applications. Pressure Vee's may be used individually or in multiples, with or without

male and female adapter rings. Adapters should be used whenever the stuffing box is machined flat. For best sealing, snug the rings within the confining cavity.

TYPES AVAILABLE


- **FABRIC-REINFORCED:** High-tensile fabric material with an elastomer binder. -45 to +250 F. For general hydraulic use.
- **NITRILE (BUNA N) RUBBER:** 80 Durometer homogeneous rubber. -45 to +250 F. For standard pneumatic use. AN 6225 Series Vee's available upon request.
- **NYLON:** A hard glass-filled nylon, non-extrusion, high pressure adapter material. 300 F maximum.

ORDERING INFORMATION

Please review current price list for tooling availability before ordering. A nominal tooling charge may be required for some non-tooled sizes.




Add Prefix VP to signify Vee Packings.

e.g. A Vee Packing assembly with 1 male adapter .. 3 fabric vee's .. 2 nitrile vee's .. 1 female adapter .. 2 1/2 I.D. X 3 1/4 O.D. is Part No: VP 02500325 1-3-2-1.

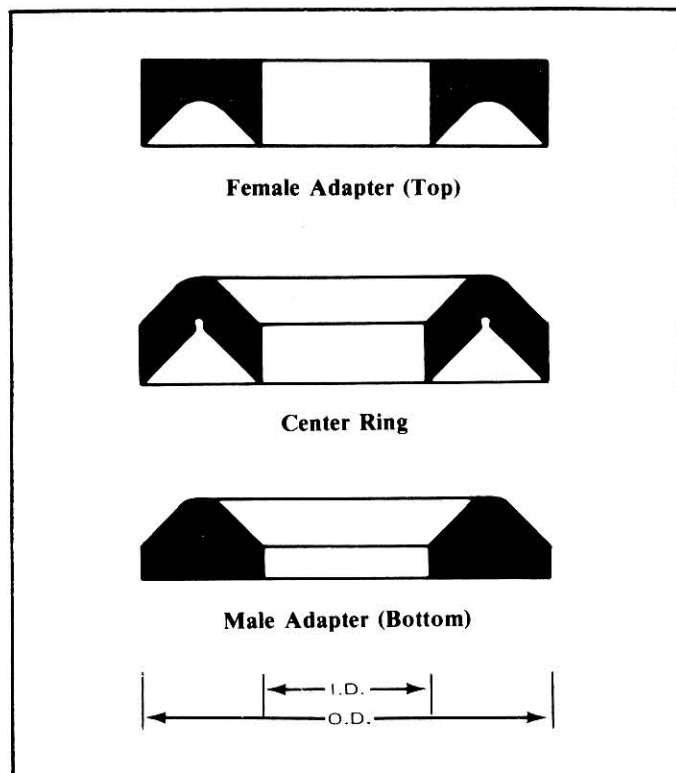

VEE PACKINGS

TYPE VP
STYLE 75 (INCH SIZES)

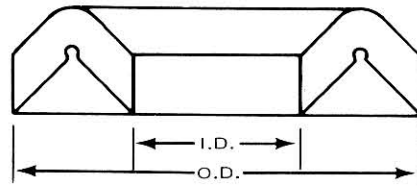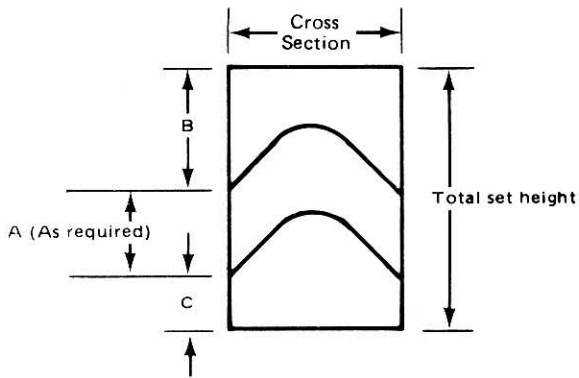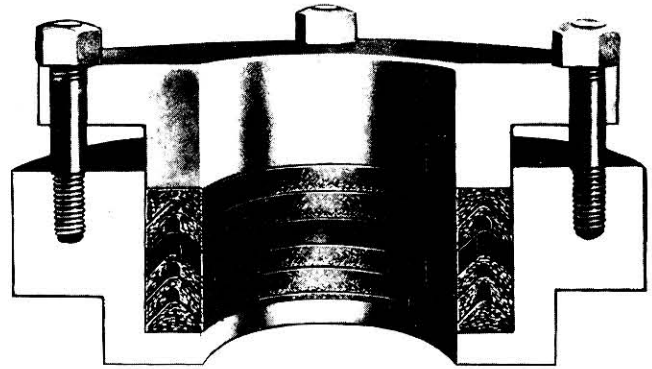

**CHART FOR STACK HEIGHT
CALCULATION**

| CROSS SECTION | 3/16 .187 | 1/4 .250 | 5/16 .312 | 3/8 .375 | 7/16 .437 | 1/2 .500 | 5/8 .625 | 3/4 .750 |
|-----------------|--------------|-------------|--------------|-------------|--------------|-------------|-------------|-------------|
| VEES (A) | .094 | .125 | .156 | .187 | .218 | .250 | .312 | .375 |
| ADAPTERS | | | | | | | | |
| NYLON | | | | | | | | |
| MALES (C) | .12 | .12 | .12 | .12 | .12 | .12 | .12 | .12 |
| FEMALES (B) | .206 | .233 | .259 | .287 | .314 | .341 | .395 | .449 |
| FABRIC | | | | | | | | |
| MALES (C) | .072 | .125 | .125 | .125 | .125 | .125 | .125 | .125 |
| FEMALES (B) | .185 | .250 | .270 | .286 | .315 | .341 | .352 | .431 |

TOLERANCE: +.012 to -.005 PER RING